

PRO-PLUS

Where style meets strength



Coretec®

Trust in every step

Choosing the right floor can be overwhelming. Some people prioritise aesthetics, some go for quality and others opt for ease of use. Instead of compromising, we've combined the best of all worlds in one floor: Coretec®. Aesthetically refined, but also exceptionally durable. Comfortable to walk on, yet also waterproof and wear resistant. Easy to install and maintain.

That's trust in every step.



Warm feeling thanks to our cork backing

All our floors have a unique attached cork underlayment. Why? It's warmer, quieter and easily installs over existing hard surfaces, perfectly concealing imperfections in subfloors.

And: it's one of the most sustainable materials out there. Cork is harvested from the cork tree and can be re-harvested every decade without damaging the tree.

Easy to maintain

Cleaning our floors is child's play. Thanks to our high performance wear layers, Coretec® floors are easy to clean and easy to maintain.

Spilled something? No worries, you can easily clean it up, using your floor cleaner or our recommended Coretec® Cleaning Kit.



100% waterproof floors

Our floors are 100% waterproof, kid proof & pet proof. Try them in your kitchen or bathroom: they won't warp or buckle, even if submerged in water.

Our 100% waterproof core, resilient vinyl and protective wear layer will keep your floor looking good for the life of your home. So naturally, all Coretec® floors come with a limited lifetime residential warranty.

Time saving solution


Coretec® is easy to install, to care for and to live with. Its secure angle tap system doesn't require any glue or nails and can be installed over existing floors without additional underlayment.

Forget about sanding, polishing, sealing or refinishing: our floors are maintenance-free.



Pro Core® 5 mm

The original 100% waterproof floor, with extra dent & impact resistance

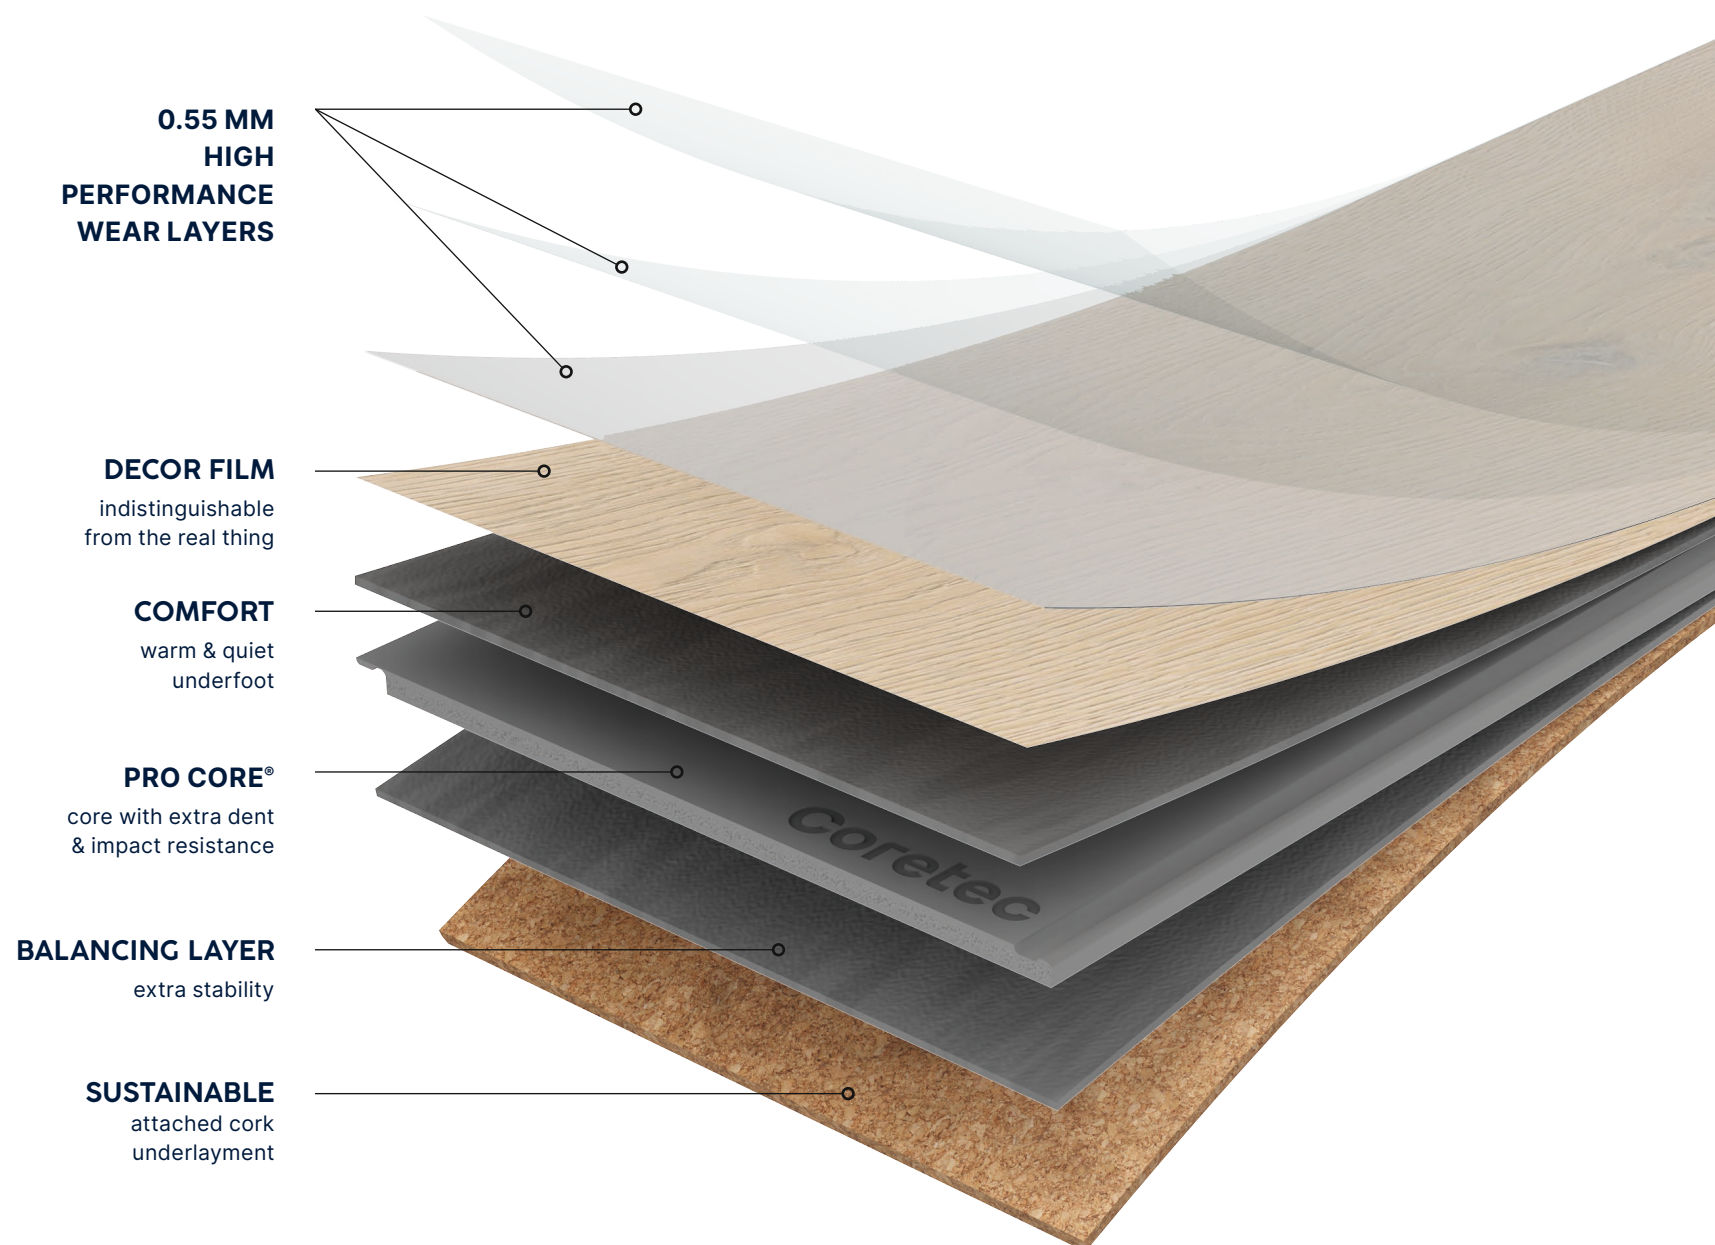

100% waterproof



Extremely stable



No acclimatisation necessary



Easy to install



Installation on any surface



Reduces noise



Wear resistant



Pet proof



Electrostatic performance



Ideal for underfloor heating & cooling

Floors for high demands

ProPlus doesn't need intricate designs to make a statement. Its minimalist aesthetic has a unique charm of its own and directs attention to what truly matters: its exceptional durability.

Where style meets strength

PRO-PLUS

Coretec®

TILE 4V

610 × 472 mm

 5,00 mm

 0,55 mm

 10 pcs
2,88 m²
± 24 kg

1200 MB

1220 × 183 mm

 5,00 mm

 0,55 mm

 12 pcs
2,68 m²
± 22 kg

1500 4V

1520 × 183 mm

 5,00 mm

 0,55 mm

 10 pcs
2,78 m²
± 23 kg

1200 MB E

1220 × 183 mm

 5,00 mm

 0,55 mm

 12 pcs
2,68 m²
± 22 kg





1200 MB series

Comcast

50 RLV 1201
1220 × 183 × 5 mm



1200 MB series

Oriental

50 RLV 1202
1220 × 183 × 5 mm



1200 MB series

Kronos

50 RLV 1203
1220 × 183 × 5 mm



IMPERIAL
50 RLV 1207



1200 MB series

Century

50 RLV 1204
1220 × 183 × 5 mm



1200 MB series

Imperial

50 RLV 1207
1220 × 183 × 5 mm



1200 MB series

Bellagio

50 RLV 1220
1220 × 183 × 5 mm





MULTICOLOUR EFFECT

1200 MB series

Excalibur

50 RLV 4557
1220 × 183 × 5 mm



1200 MB series

Palazzo

50 RLV 4651
1220 × 183 × 5 mm



1200 MB E series

Mandelay

50 RLVR 4352
1220 × 183 × 5 mm






1200 MB E series

Venetian

50 RLVR 4356
1220 × 183 × 5 mm

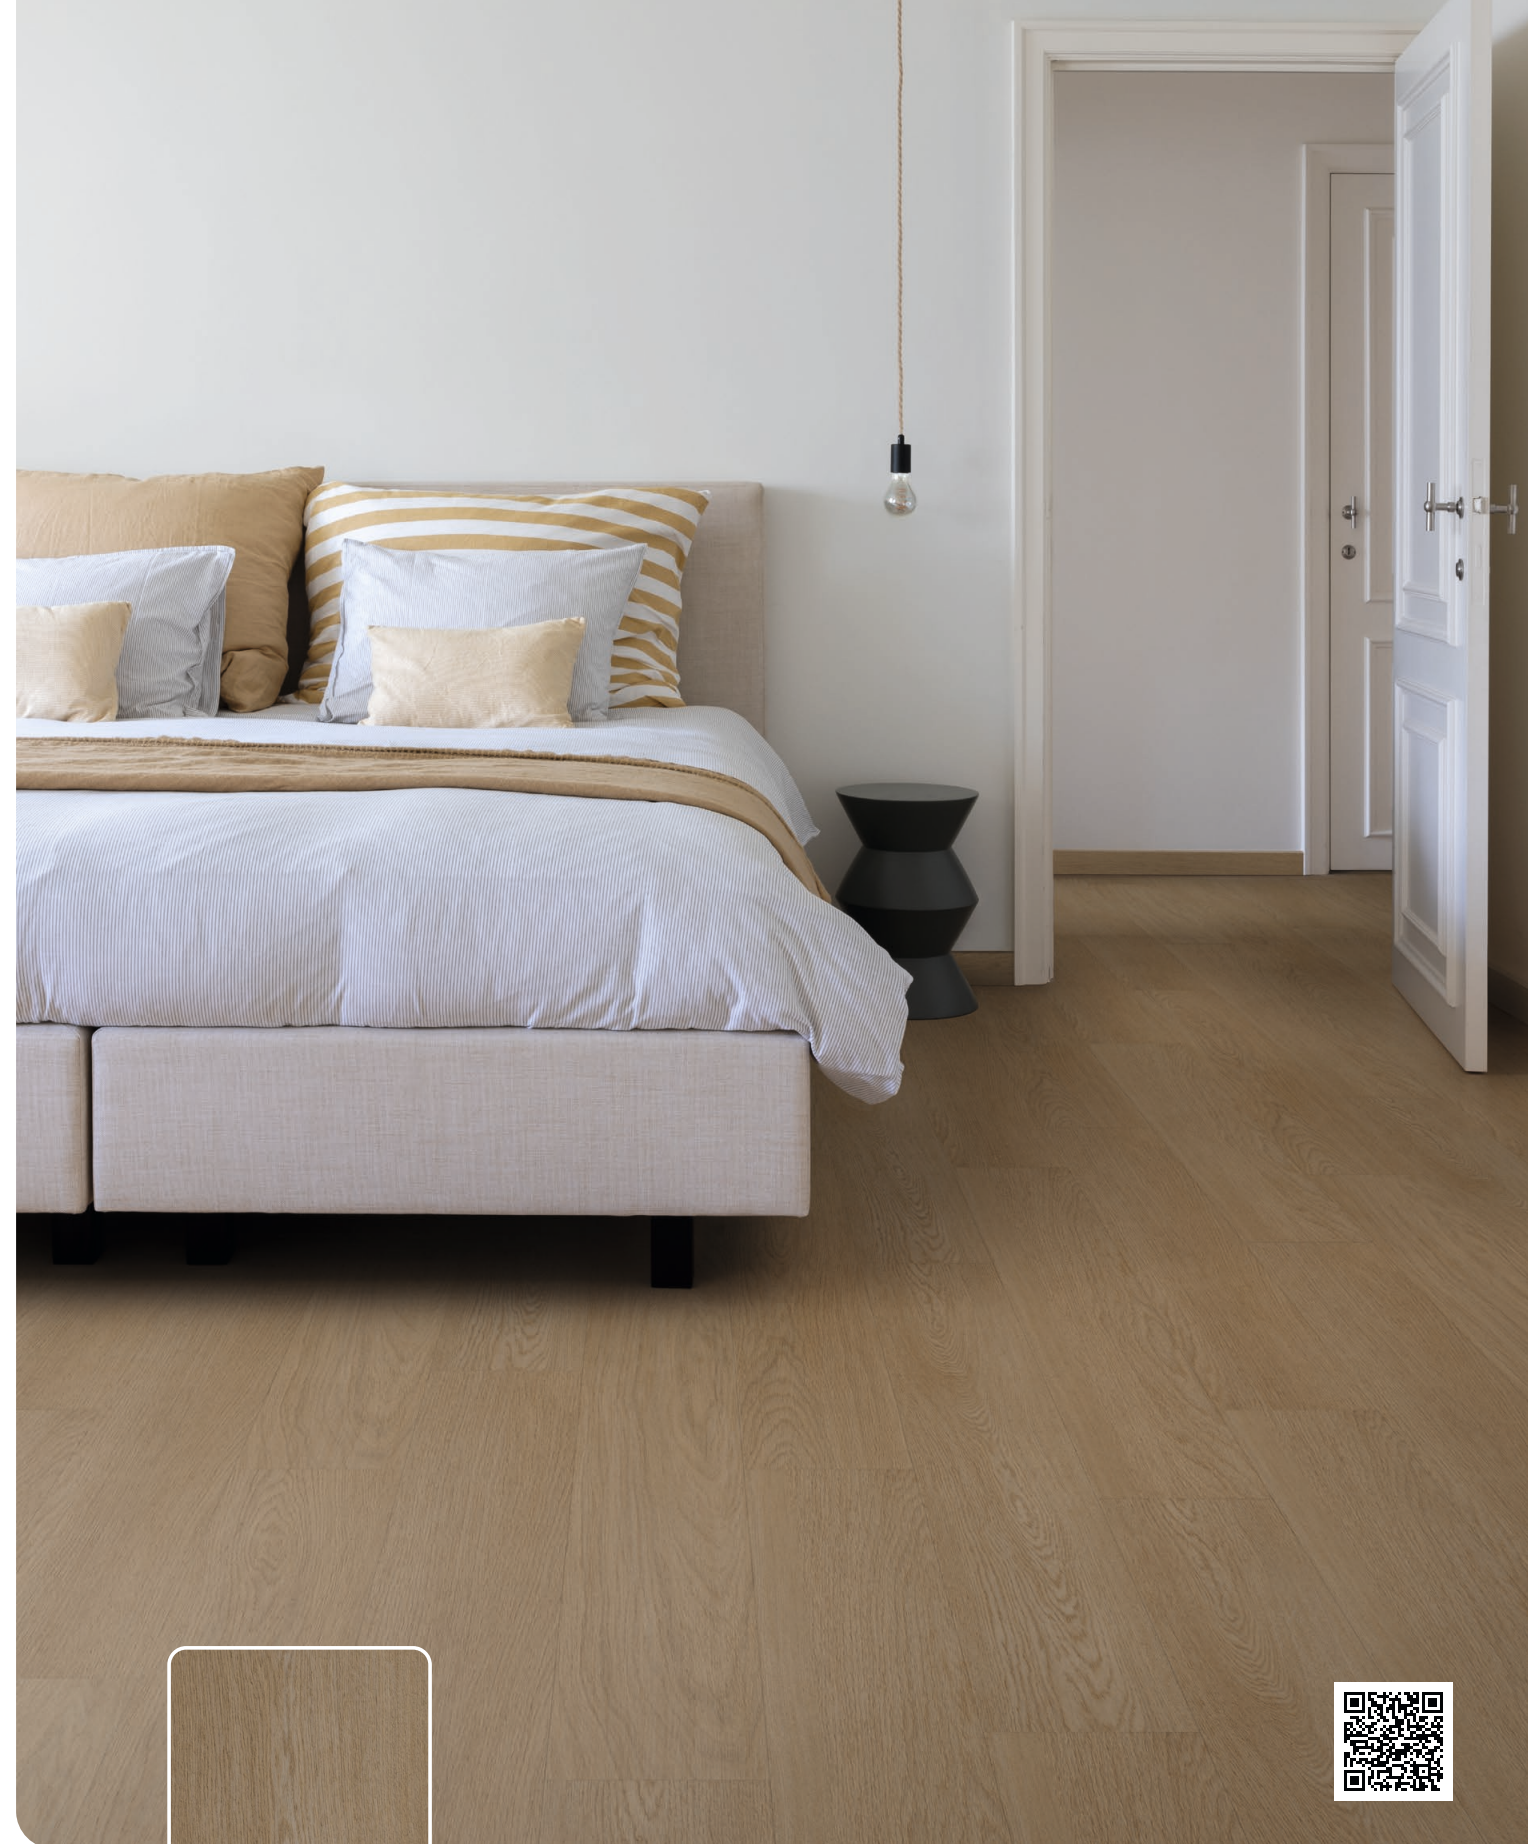

1200 MB E series

Rio

50 RLVR 4455
1220 × 183 × 5 mm



1200 MB E series

Wynn

50 RLVR 4416
1220 × 183 × 5 mm





1500 4V series

Kingdom

50 RLVE 1228
1520 × 183 × 5 mm



TILE 4V series

Cristal

50 RLVE 4191
610 × 472 × 5 mm



TILE 4V series

Stratosphere

50 RLVE 4193
610 × 472 × 5 mm





1500 4V series

Kingdom

50 RLVE 1228
1520 × 183 × 5 mm



TILE 4V series

Cristal

50 RLVE 4191
610 × 472 × 5 mm



TILE 4V series

Stratosphere

50 RLVE 4193
610 × 472 × 5 mm





TILE 4V series

Millennium

50 RLVE 4298

610 × 472 × 5 mm



TILE 4V series

Tropicana


50 RLVE 4767

610 × 472 × 5 mm




Accessories

Paintable skirtings



13.8 cm 1.8 cm 2 m
70 PSK2000-1




10.2 cm 1.3 cm 2.3 m
70 PSK2300-3



10 cm 2.2 cm 2 m
70 PSK2000-2



6.6 cm 1.3 cm 2.3 m
70 PSK2300-2



4 cm 1 cm 2.3 m
70 PSK2300-1




Ontdek alle accessoires

Matching design accessories



.... = Matching design reference



5.8 cm 1.3 cm 2.4 m
70 MS11

Aluminium profiles




2001
Matte black




2002
Brushed aluminium




2003
Champagne bronze



4-7.5 mm 2.7 cm 2 m
70 ATP PC



4-7.5 mm 3.4 cm 2 m
70 ARP PC




4-7.5 mm 2.1 cm 2 m
70 AEP PC

Installation

Easy installation

Coretec® floors have the easiest install on the market.

Watch our installation video on our website
www.coretecfloors.com, or by scanning the QR code.

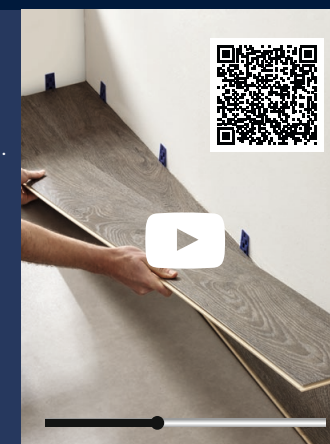

Maintenance

The Coretec® Clean, quick & green kit:

- Daily cleaner
- Deep cleaner
- Stain remover



80 CCS 3400

Technical specifications (IT - ES - PT)

Level of use Classe d'uso / Clasificación de uso / Classe de utilização Class 23 / 33 (EN ISO 10874)	Geometrical characteristics Fantasie geometriche / Características geométricas / Características geométricas Conform (EN 17539)	Wear resistance Resistenza all'usura / Resistencia al desgaste / Resistência ao desgaste Pass 5000 cycles (ISO 24338)	Castor chair resistance Resistenza alle sedie con ruote / Resistencia a sillas con ruedas / Resistência a cadeira de rodas Pass 25000 cycles (ISO 4918)	Effect of furniture leg Effeto furniture leg / Efecto de la pata de un mueble / Efeito da perna do móvel No visible change (EN 16581)	Residual indentation Indentazione residua certificata / Huella residual / Recuo Residual ≤ 0.10 mm (EN ISO 24343-1)	Resistance to staining Resistenza alle macchie / Resistencia al manchado / Resistência a manchas 5 (no visible change) (EN 438-2)	Locking strength Chiusura perfetta con sistema a click / Resistencia a la tracción / Força de encaixe LS ≥ 2.0 / SS ≥ 3.5 (EN 24334)	Dimensional stability Stabilità dimensionale / Estabilidad dimensional / Estabilidade dimensional Pass ≤ 0.25% (EN ISO 23999)
--	---	---	--	---	---	---	--	---

Colour fastness to light Resistenza alla luce / Solidez del color a luz artificial / Resistência da cor à luz > grade 6 (EN ISO 105-B-02)	Impact sound reduction Isolamento acustico / Aislamiento acústico / Isolamento acústico ΔL _w = 17 dB (ISO 10140-3 / EN 717-2)	Formaldehyde emission class Classe Formaldeide / Emisión formaldehído / Classificação formaldeído E1 (EN 717-1)	Fire classification Classe di resistenza al fuoco / Resistencia al fuego / Classificação de Fogo Bfl - S1 (EN 13501)	Slip resistance Coeficiente dinamico di attrito / Coeficiente de fricción / Coeficiente de atrito DS - R10 (EN 13893 - DIN 51130)	Underfloor heating Riscaldamento a pavimento / Calefacción por suelo radiante / Aquecimento por piso radiante Suitable (see: Underfloor heating guidelines)	Electrostatic performance Performance elettrostatica / Rendimiento antiestático / Acumulação de cargas eletrostáticas ≤ 2 kV (EN 1815)	Thermal resistance Resistenza al calore / Aislamiento térmico / Isolamento térmico 0.0318 m²-K/W (EN 12667)
---	--	---	--	---	---	--	---

Technical specifications (FI - SV - NO - DK)

Level of use Käyttöluokka / Klassificering användningsområde / Bruksklasse / Anvendelsesgrad Class 23 / 33 (EN ISO 10874)	Geometrical characteristics Geometriset ominaisuudet / Geometrisk karakteristik / Geometriske kjennetegn / Geometriske egenskaber Conform (EN 17539)	Wear resistance Kulutuksenkesto / Slitstyrka / Slitestyrke / Slidstyrke Pass 5000 cycles (ISO 24338)	Castor chair resistance Pyörällisen toimistotuolin kesto / Tålighet mot rullhjul / Motstandsdyktighet / Modstandsdygtighed over for hjulstol Pass 25000 cycles (ISO 4918)	Effect of furniture leg Huonekalun jalkojen kesto / Verkan från möbelben / Effekt møbelbein / Virkning af møbelben No visible change (EN 16581)	Residual indentation Jäännöspainuma / Beständighet mot intrycksmärken / Motstandsdyktighet mot trykkmærker / Resterende indtryk ≤ 0.10 mm (EN ISO 24343-1)	Resistance to staining Tahraantumisenkesto / Fläckbeständighet /Motstandsdyktighet mot flekker / Modstandsdygtighed over for pletter 5 (no visible change) (EN 438-2)	Locking strength Lukituksen vahvuus / Låsningsstyrka / Låsestabilitet / Låsningsstyrke LS ≥ 2.0 / SS ≥ 3.5 (EN 24334)	Dimensional stability Mittavakaus / Dimensionsstabilitet vid värmepåverkan / Formstabilitet / Dimensionel stabilitet Pass ≤ 0.25% (EN ISO 23999)
--	---	--	--	--	---	--	---	---

colour fastness to light Valonkesto / Färghårdighet / Lysfasthet / Låsningsstyrke > grade 6 (EN ISO 105-B-02)	impact sound reduction Askeläänen parannusarvo / Ljudisolering /Akustisk isolasjon (lydisolering) / Reduktion af stødlyd ΔL _w = 17 dB (ISO 10140-3 / EN 717-2)	formaldehyde emission class Formaldehydiluokka / Formaldehydmission /Formaldehyd emisjonsgruppe / Formaldehydemissionsklasse E1 (EN 717-1)	fire classification Paloluokka / Flamsäkerhet / Brannklasse / Brandklassificering Bfl - S1 (EN 13501)	slip resistance Kitka / Halksäkerhet / Sklimotstand / Skridsikkerhed DS - R10 (EN 13893 - DIN 51130)	Underfloor heating Lattialämmitys / Värmegolv / Gulvvarme / Gulvvarme Suitable (see: Underfloor heating guidelines)	electrostatic performance Sähköstaattinen varautuminen / Prestanda statisk elektricitet / Elektrostatisk ytelse (antistatisk) / Elektrostatisk ydeevne ≤ 5 kV (EN 1815)	thermal resistance Lämmönvastus / Värmemotstånd / Varmebestandighet / Termisk modstandsdygtighed 0.0318 m²-K/W (EN 12667)
---	---	---	---	--	---	--	--

Technical specifications (SK - PL - RU - HU - CZ - LT)

Level of use

Úroveň použitia / Klasa ścieralności / Класс использования / Európai besorolás / Úroveň použití / Atsparumo klasė
Class 23 / 33 (EN ISO 10874)

Geometrical characteristics

Geometrické parametre / Charakterystyka Geometryczna / геометрические характеристики / Geometriai jellemző / Rozměry / Geometrinės savybės
Conform (EN 17539)

Wear resistance

Odolnosť voči opotrebeniu / Wytrzymałość na zużycie / износостойкость / Korásállóság / Odolnost proti opotřebení / Atsparumas dilimui
Pass 5000 cycles (ISO 24338)

Castor chair resistance

Odolnosť voči kolieskam na stoličke / Odporność na krzesła obrotowe z kółkami / Стойкость к креслам с роликами / Görgös szék teszt / Odolnost vůči kolečkovým židlým / Atsparumas kėdžių ratukams
Pass 25000 cycles (ISO 4918)

Effect of furniture leg

Effekt z nôh nábytku / Wpływ nogi meblowej / воздействие мебельных ножек / Bútorlábhatás / Vliv nábytkové nožky / Baldų poveikis
No visible change (EN 16581)

Residual indentation

Trvalá deformácia / Pozostałe wgniecenie / остаточные вмятины / Megmaradó benyomódás / Trvalá deformace / Likęs įdubimas
≤ 0.10 mm (EN ISO 24343-1)

Resistance to staining

Odolnosť voči napúšťaniu farbou / Odporność na barwienie / устойчивость к пятнообразованию / Foltállóság / Odolnost proti vzniku skvrn / Atsparumas dėmėms
5 (no visible change) (EN 438-2)

Locking strength

Pevnosť pripojenia / Wytrzymałość blokowania / прочность крепления / Záróerő / Pevnostzajištění / Blokavimo jėga
LS ≥ 2.0 / SS ≥ 3.5 (EN 24334)

Dimensional stability

Rozmerová stabilita / Stabilność wymiarowa / Стабильность размеров / Méretstabilitás / Rozměrová stabilita / Matmenų stabilumas
Pass ≤ 0.25% (EN ISO 23999)

Colour fastness to light

Stálosť farby na svetle / Odporność koloru na światło / устойчивость окраски к свету / Színtartósság / Stalobarevnost na světle / Spalvų atsparumas šviesai
> grade 6 (EN ISO 105-B-02)

Impact sound reduction

Akustická izolácia / Izolacja akustyczna / Звукоизоляция / Hangszigetelés / Akustická izolace / Garso slopinimas
ΔL_w = 17 dB (ISO 10140-3 / EN 717-2)

Formaldehyde emission class

Formaldehidyová skupina / Emisja formaldehydu / Класс эмиссии формальдегида / Formaldehyd csoport / Formaldehidyová skupina / Formaldehyde group
E1 (EN 717-1)

Fire classification

Klasifikácia voči požiaru / klasyfikacja ogniowa / класс огнестойкости / Tűzállósági osztály / Požární klasifikace / Degumo klasifikacija
Bfl - S1 (EN 13501)

Slip resistance

Protišmykovosť / Śliskość / Стойкость к скольжению / Csúszásmentes / Protiskluznost / Slidumo klasė
DS - R10 (EN 13893 - DIN 51130)

Underfloor heating

Podlahové vykurovanie / Ogrzewanie podłogowe / Полы с подогревом / Padlófűtésre / Podlahové vykurování / Šildomos grindys
Suitable (see: Underfloor heating guidelines)

Electrostatic performance

Elektrostatické prevedenie / Akumulacja ładunków elektrostatycznych / Электростатичность / Elektromos feltöltődés / Elektrostatické provedení / Antistatiškumas
≤ 2 kV (EN 1815)

Thermal resistance

Teplná odolnosť / Odporność cieplna / термостойкость / Hőállóság / Teplotní odolnost / Terminis atsparumas
0.0318 m²-K/W (EN 12667)

Series	Name	SKU Number	Length (mm)	Width (mm)	Thickness (mm)			Pieces / box	M² / box	± Weight box (kg)	M² / pallet
1200 MB	Comcast	50 RLV 1201	1220	183	5			12	2,68	22	147,40
	Oriental	50 RLV 1202	1220	183	5			12	2,68	22	147,40
	Kronos	50 RLV 1203	1220	183	5			12	2,68	22	147,40
	Century	50 RLV 1204	1220	183	5			12	2,68	22	147,40
	Imperial	50 RLV 1207	1220	183	5			12	2,68	22	147,40
	Bellagio	50 RLV 1220	1220	183	5			12	2,68	22	147,40
	Excalibur	50 RLV 4557	1220	183	5			12	2,68	22	147,40
	Palazzo	50 RLV 4651	1220	183	5			12	2,68	22	147,40
1200 MB E	Mandelay	50 RLVR 4352	1220	183	5		●	12	2,68	22	147,40
	Venetian	50 RLVR 4356	1220	183	5		●	12	2,68	22	147,40
	Wynn	50 RLVR 4416	1220	183	5		●	12	2,68	22	147,40
	Rio	50 RLVR 4455	1220	183	5		●	12	2,68	22	147,40
1500 4V	Piano	50 RLVE 1213	1520	183	5	●		10	2,78	23	139,00
	Metropol	50 RLVE 1216	1520	183	5	●		10	2,78	23	139,00
	Mirage	50 RLVE 1218	1520	183	5	●		10	2,78	23	139,00
	Kingdom	50 RLVE 1228	1520	183	5	●		10	2,78	23	139,00
TILE 4V	Cristal	50 RLVE 4191	610	472	5	●		10	2,88	24	149,76
	Stratosphere	50 RLVE 4193	610	472	5	●		10	2,88	24	149,76
	Millennium	50 RLVE 4298	610	472	5	●		10	2,88	24	149,76
	Tropicana	50 RLVE 4767	610	472	5	●		10	2,88	24	149,76





It's in our **core** to adore nature

Our commitments



Choose me once, love me for life

We believe in a world where things last! For a lifetime, and longer. That's good for you, and also for the planet. So our products carry a lifetime guarantee for domestic use, and a 10-year guarantee for commercial use.



Breathe healthy air

The GreenGuard Gold certification is recognised as one of the most stringent in the world, going beyond the A+ rating for indoor air quality. This means that your floor contributes to the healthiest environment for working and living, and protects the most sensitive people.



Sustainable cork underlay

Cork is a highly durable material. It retains its natural springiness even after years of use, while woods planted with cork oak reduce CO₂ emissions.



We can prove it

Don't take our word for it, look at the proof! Coretec® meets the standards for numerous quality labels and certificates. Our floors are free of heavy metals (such as lead) and phthalates.



Second Life

So you're changing your floor? Why not give the old Coretec® floor a second life! You can gift your old floor via Second Life Floors. Because your old floor is perfectly fine to start a new story in a new location.



Do your bit for forest conservation

There is no wood in a Coretec® floor. So no trees are cut down to make your home beautiful. More than that: we are active in forest conservation, worldwide.



Coretec®



**Coretec® floors are
that good, somebody else
can re-enjoy it.**

Learn how your Coretec® floor gets a second life.



Coretec®, the natural choice



Lifetime
warranty
residential



10 year
warranty
commercial



Warranty (Years) The warranty covers manufacturing defects and premature wear in the event of normal use.
Garanzia (anni) La garanzia copre i difetti di produzione e usura prematura in caso di corretto e normale utilizzo.
Garantía (años) La garantía cubre los defectos de fabricación y el desgaste prematuro en caso de uso normal.
Garantia (anos) A garantia cobre defeitos industriais e uso prematuro usado normal.
Takuu (vuosi) Takuu kattaa valmistusvirheet ja normaalista käytöstä johtuvan pinnan puhkikulumisen.
Garanti (år) Garantien gjelder mot produksjonsfeil, og for tidlig slitasje ved normalt bruk av gulvet.
Garanti (år) Garantien gäller tillverkningsfel och för tidig utslitning vid normalt användande.
Garanti (år) Garantien gælder for fabrikationsfejl og for tidlig slid ved normal brug.
Záruka (rok) Záruka sa vzťahuje na výrobné chyby a predčasné opotrebenie v prípade bežného používania.
Termin gwarancji (rok) Gwarancja obejmuje wadyfabryczne i przedwczesne zużycie w przypadku normalnego użytkowania.
Гарантия (лет) Гарантия покрывает производственные дефекты и преждевременный износ при нормальном использовании.
A garancia gyártási hibákra és idő előtti elhasználódásra általános használatnál érvényes.
Záruka (rok) Záruka se vzťahuje na vady z výroby a predčasné opotrebení v prípade bežného používání.
Garantija (Metali) Garantija taikoma gamybos trūkumams ir per greitam nusidėvėjimui eksploatuojant normaliomis sąlygomis

Coretec®

Souverainestraat 27 - 9770 Kruisem (Belgium)
info@usfloors.be - www.coretecfloors.com



US FLOORS INTERNATIONAL BV, A PROUD DIVISION OF  INDUSTRIES